



- Support RS485, Wiegand34 protocol(Wiegand 26 optional)
- 13.56MHz(Mifare)
- 125KHz(EM-ID)
- Red and Green LEDs
- Watch dog function ensure device free from halting
- Beep Buzzer and LED indicator
- Surface mounted installation



LAR503C

RFID Reader

Caratteristiche generali

System

Main Processor	8 Bit
----------------	-------

Read

Read Format	13.56MHz	125KHz
-------------	----------	--------

Read Range	1cm–8cm (max.)
------------	----------------

Reading time	<0.1s
--------------	-------

Function

Tamper Alarm	Yes
--------------	-----

Interface

To Controller	RS485, Wiegand34(Wiegand 26 optional)
---------------	---------------------------------------

General

LED Display	Blue backlight
-------------	----------------

Beep Tone	Buzzer
-----------	--------

Power Supply	9V–15V DC/100mA
--------------	-----------------

Operating Temperature	-30°C to +60°C
-----------------------	----------------

Working Humidity	≤95%
------------------	------

Dimension(W×D×H)	87mm×13mm×136mm
------------------	-----------------

Weight	0.25kg
--------	--------



Working Environment	Indoor
---------------------	--------

Certificates

CE	Yes
----	-----

FCC	Yes
-----	-----

Dimensioni

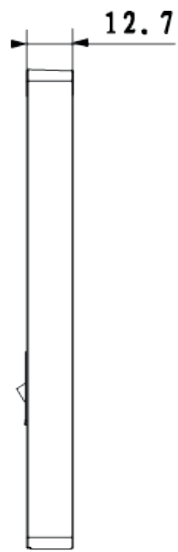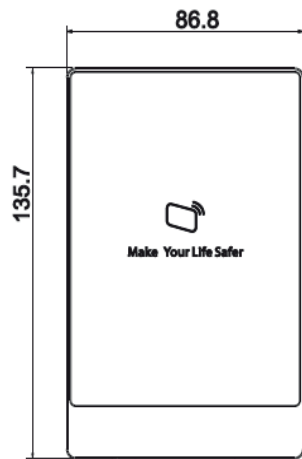

Hiltron Land S.r.l.

Strada Provinciale di Caserta, 218 80144 - Napoli - Italy
Tel: (+39) 081.185.39.000 Fax: (+39) 081.185.39.016
www.hiltronsecurity.net