



- Support 100,000 valid cards & 150,000 records
- Support multiple cards
- Support card, password, fingerprint and combination
- TCP/IP interface to PC
- Wiegand or RS-485 interface to readers(4 door)
- Door time out alarm, intrusion alarm, duress alarm and tamper alarm
- Anti-passback, multi-door interlock, multi-card open
- Support 128 efficient time and holiday schedules
- Watch dog function ensure device free from halting
- Surface mounted installation

LAK4

Four Door One Way Access Controller



Caratteristiche generali

System

Main Processor	32 Bit
Memory	16M

Input/Output Ports

Input	Inputs x 9 (door sensor x 4, exit button x 4, alarm x 1)
Output	Relay x 5(door lock x 4, alarm x 1)
Reader	Reader x 4

Capacity

Card holders/Events	100,000/150,000
---------------------	-----------------

Function

Access control	Anti-pass back, Multi-interlock, Multi-card unlock
User Management	General, VIP, Guest, Patrol, Black list, Duress
Alarm Function	Door time out alarm, Intrusion alarm, Duress alarm, Tamper alarm
Period	Support 128 groups of schedule, 128 groups of period and 128 groups of holiday period

Interface

To PC	RJ45(10/100M)
To Reader	Wiegand/ RS485



General

RTC	Yes
Power Supply	DC 9-15V/500mA
Operating Temperature	-30°C to +60°C
Working Humidity	≤95%
Dimension(WxDxH)	210mm×51mm×106mm
Weight	0.5Kg
Working Environment	Indoor

Certificates



CE	Yes
FCC	Yes

Dimensioni

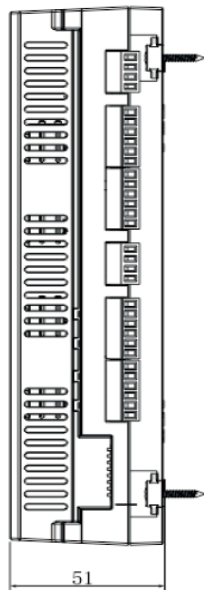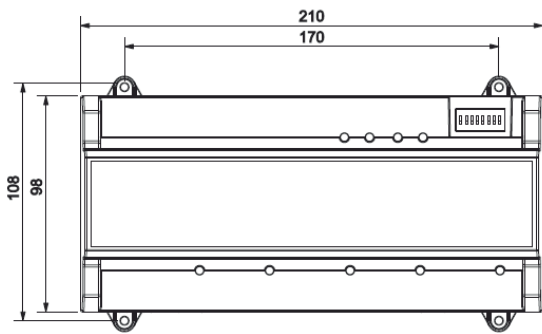

Application

Multi-door Management
Four door controller

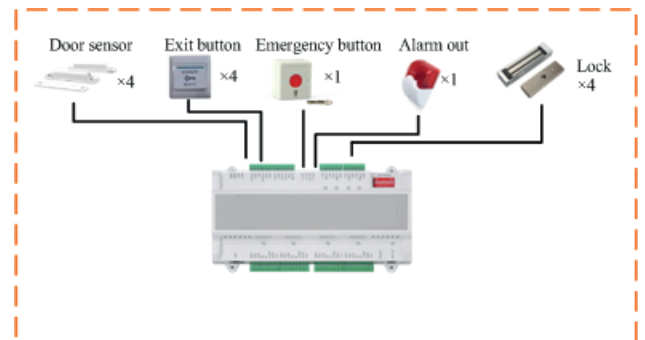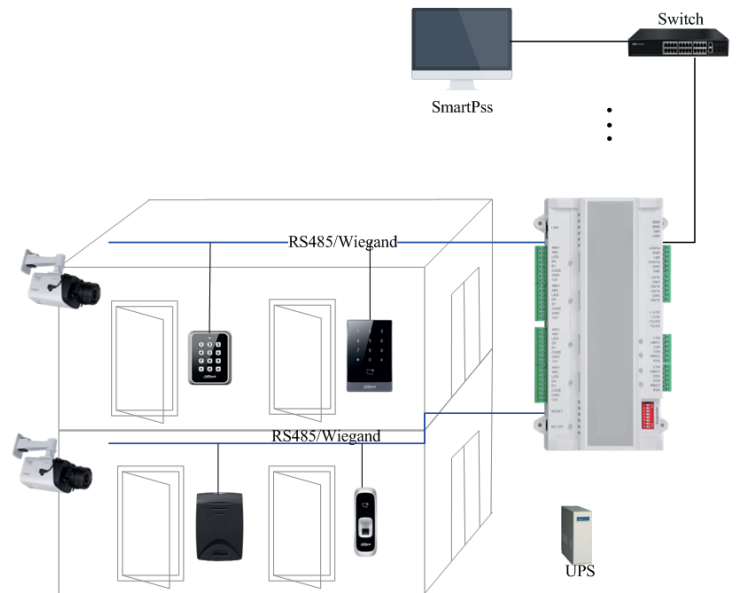

Hiltron Land S.r.l.

Strada Provinciale di Caserta, 218 80144 - Napoli - Italy
Tel: (+39) 081.185.39.000 Fax: (+39) 081.185.39.016
www.hiltronsecurity.net