



- Support 100,000 valid cards & 150,000 records
- Support multiple cards
- Support card, password, fingerprint and combination
- TCP/IP interface to PC
- Wiegand or RS-485 interface to readers
- Door time out alarm, intrusion alarm, duress alarm and tamper alarm
- Anti-pass back, multi-door interlock, multi-card open
- Support 128 efficient time and holiday schedules
- Watch dog function ensure device free from halting
- Surface mounted installation
- Accumulator battery extension
- Watch dog function ensure device free from halting
- Surface mounted installation



## LAK8

Eight Door One-Way Access Controller

### Caratteristiche generali

#### System

Main Processor	32 Bit
Memory	16M

#### Input/Output Ports

Input	Inputs x 20 ( Door sensor x 8, Exit button x 8, Alarm x 4)
Output	Relay x 12(door lock x 8, External alarm x 4 )
Reader	Reader x 8

#### Capacity

Card holders	100,000
Events	150,000

#### Function

Control Mode	Eight door one-way
Access control	Anti-pass back, Multi-interlock, Multi-card unlock
User Management	General, VIP, Guest, Patrol, Black list, Duress
Alarm Function	Door time out alarm, Intrusion alarm, Duress alarm, Tamper alarm
Period	Support 128 groups of schedule, 128 groups of period and 128 groups of holiday period

#### Interface

To PC	RJ45(10/100M)
To Reader	Wiegand 26/34, RS485


#### Genreal

RTC	Yes
Power Supply	AC85-AC264, 50/60Hz
Operating Temperature	-30°C to +60°C
Working Humidity	≤95%
Dimension(W×D×H)	266mm×87mm×290mm
Weight	2kg
Working Environment	Indoor

#### Certificates


CE	Yes
FCC	Yes

## Dimensioni

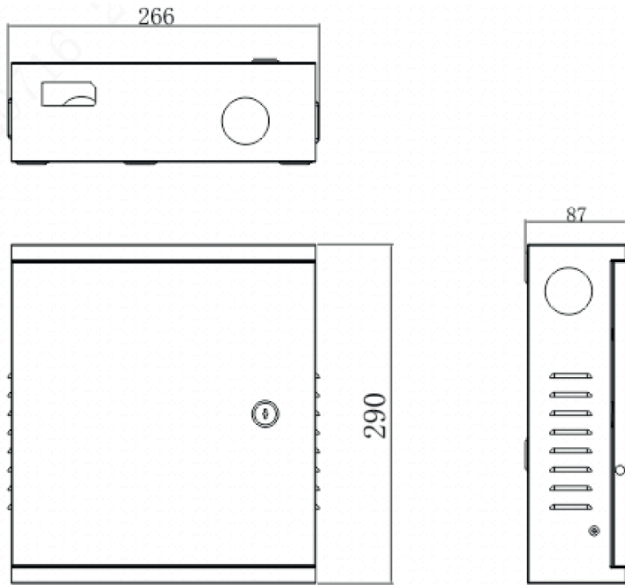

## Application

Multi-door Management  
Eight door two way controller

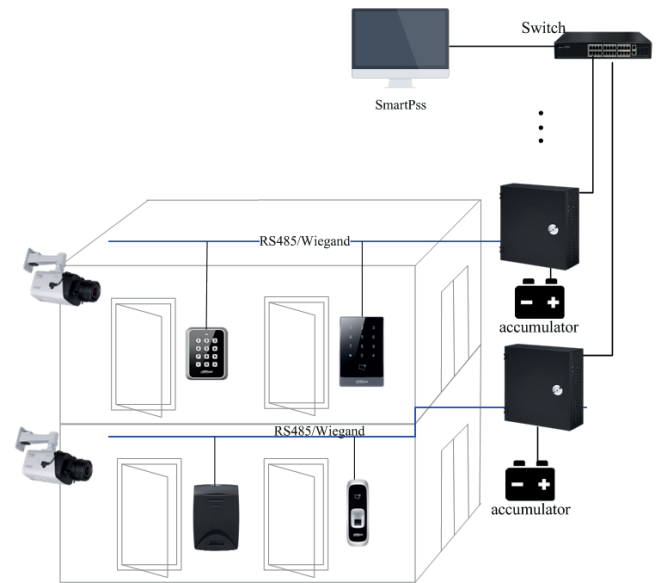

### Hiltron Land S.r.l.

Strada Provinciale di Caserta, 218 80144 - Napoli - Italy  
Tel: (+39) 081.185.39.000 Fax: (+39) 081.185.39.016  
[www.hiltronsecurity.net](http://www.hiltronsecurity.net)