



- Montaggio : Apparente
- Colore : Argento
- Visualizzazione LED : 1 LED tricolore
- Distanza di lettura [cm] : 7
- Interfaccia Wiegand : 26 bits, 28 bits, 30 bits, 32 bits, 34 bits, 37 bits, 40 bits
- Tecnologia di tessera : Mifare Ultralight, Mifare Classic, Mifare Desfire 13.56MHz

LAK8

Eight Door One-Way Access Controller

Caratteristiche generali

System

Main Processor	32 Bit
Memory	16M

Input/Output Ports

Input	Inputs x 20 (Door sensor x 8, Exit button x 8, Alarm x 4)
Output	Relay x 12 (door lock x 8, External alarm x 4)
Reader	Reader x 8

Capacity

Card holders	100,000
Events	150,000

Function

Control Mode	Eight door one-way
Access control	Anti-pass back, Multi-interlock, Multi-card unlock
User Management	General, VIP, Guest, Patrol, Black list, Duress
Alarm Function	Door time out alarm, Intrusion alarm, Duress alarm, Tamper alarm
Period	Support 128 groups of schedule, 128 groups of period and 128 groups of holiday period

Interface

To PC	RJ45(10/100M)
To Reader	Wiegand 26/34, RS485


Genreal

RTC	Yes
Power Supply	AC85-AC264, 50/60Hz
Operating Temperature	-30°C to +60°C
Working Humidity	≤95%
Dimension(W×D×H)	266mm×87mm×290mm
Weight	2kg
Working Environment	Indoor

Certificates


CE	Yes
FCC	Yes

Dimensioni

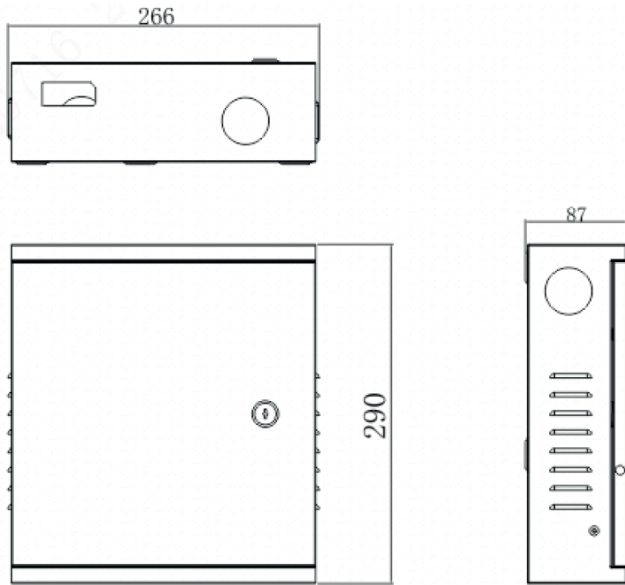

Application

Multi-door Management
Eight door two way controller

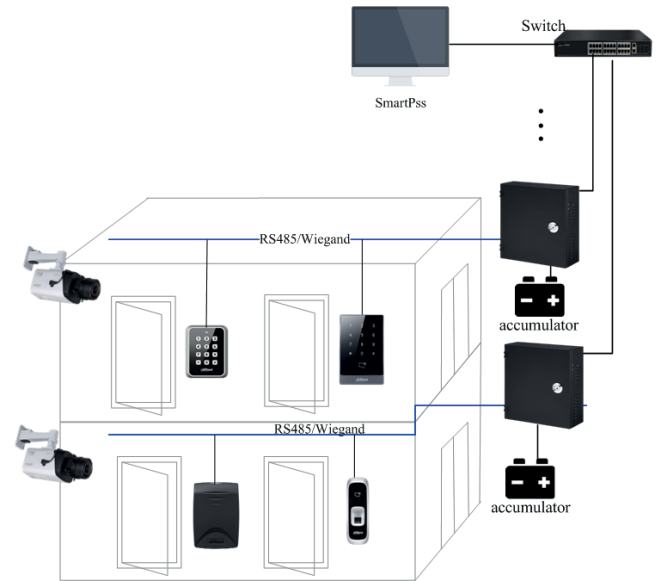

Hiltron Land S.r.l.

Strada Provinciale di Caserta, 218 80144 - Napoli - Italy
Tel: (+39) 081.185.39.000 Fax: (+39) 081.185.39.016
www.hiltronsecurity.net