



- Support RS485, Wiegand34 protocol(Wiegand 26 optional)
- 13.56MHz(Mifare)
- 125KHz(EM-ID)
- Red and Green LEDs
- Sensitive touch keypad with blue backlight
- Watch dog function ensure device free from halting
- Beep Buzzer and LED indicator



LAR503CX

RFID Reader

Caratteristiche generali

System

Main Processor	8 Bit	
----------------	-------	--

Read

Read Format	13.56MHz	125KHz
Read Range	1cm–4cm (max.)	
Reading time	<0.1s	

Function

Tamper Alarm	Yes
--------------	-----

Interface

To Controller	RS485, Wiegand34 (Wiegand 26 optional)
---------------	--


General

Keypad	12Keys (0-9,*,#)
Sensitive touch keypad	Blue backlight
Beep Tone	Buzzer
Power Supply	9V–15V DC/100mA
Operating Temperature	-30°C to +60°C
Working Humidity	≤95%
Dimension(W×D×H)	87mm×13mm×136mm
Weight	0.25kg
Working Environment	Indoor

Certificates

CE	Yes
FCC	Yes

Dimensioni

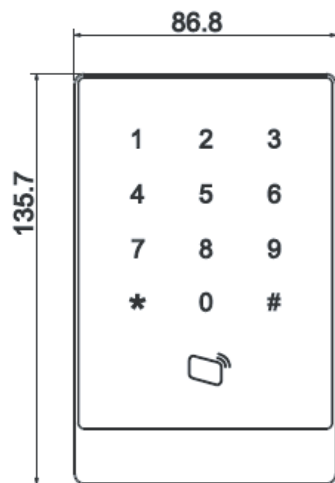

Hiltron Land S.r.l.

Strada Provinciale di Caserta, 218 80144 - Napoli - Italy
Tel: (+39) 081.185.39.000 Fax: (+39) 081.185.39.016
www.hiltronsecurity.net

REV.1121