



LARC01

Waterproof RFID Reader

- Support RS485, Wiegand34 protocol
- 13.56MHz(Mifare)
- 125KHz(EM-ID)
- Water-proof design
- An indicator light with red, green, and blue light
- Watch dog function ensure device free from halting
- Surface mounted installation
- IP66 (Apply silica gel to gaps between the device and the wall. Liquid sodium silicate is recommended. For details, see the quick start guide.)
- Surface mounted installation



Caratteristiche generali

System

Main Processor	8 Bit
----------------	-------

Read

Read Format	13.56MHz	125KHz
Read Range	1cm-3cm (max.)	
Reading time	<0.1s	

Interface

To Controller	Wiegand34, RS485
---------------	------------------


General

LED Display	Blue backlight
Beep Tone	Buzzer
Ingress protection	IP66 (Apply silica gel to gaps between the device and the wall. Liquid sodium silicate is recommended. For details, see the quick start guide.)
Power Supply	DC 9V-15V/100mA
Operating Temperature	-10°C to +55°C
Working Humidity	10%RH-90%RH (no-condensation)
Dimension(WxDxH)	72.0mmx102.4mmx18.0mm
Weight	0.2 kg
Working Environment	Indoor, Outdoor

Certificates

CE	Yes
FCC	Yes

Dimensioni

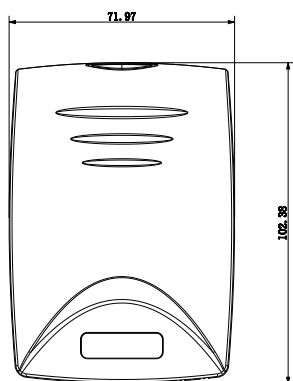

Hiltron Land S.r.l.

Strada Provinciale di Caserta, 218 80144 - Napoli - Italy
Tel: (+39) 081.185.39.000 Fax: (+39) 081.185.39.016
www.hiltronsecurity.net