



- Support RS485, Wiegand34 protocol(Wiegand 26 optional)
- 13.56MHz(Mifare)
- 125KHz(EM-ID)
- Red and Blue LEDs
- Watch dog function ensure device free from halting
- Water-proof(Outdoor use)
- Surface/Flush mounted installation



LARCX

SLIM Waterproof RFID Reader

Caratteristiche Tecniche

System

Main Processor	8 Bit
----------------	-------

Read

Read Format	13.56MHz	125KHz
Read Range	1cm~3cm (max.)	
Reading time	<0.1s	

Function

Tamper Alarm	Yes
--------------	-----

Interface

To Controller	RS485, Wiegand34(Wiegand 26 optional)
---------------	---------------------------------------


General

Keypad	12Keys (0-9,*,#)
LED Indicator	Yes
Beep Tone	Buzzer
Ingress Protection	IP55
Power Supply	9V~15V DC/100mA
Operating Temperature	-30°C to +60°C
Working Humidity	≤95%
Dimension(W×D×H)	135×47.5×16mm
Weight	0.18kg
Working Environment	Outdoor

Certificates

CE	Yes
FCC	Yes

Dimensioni

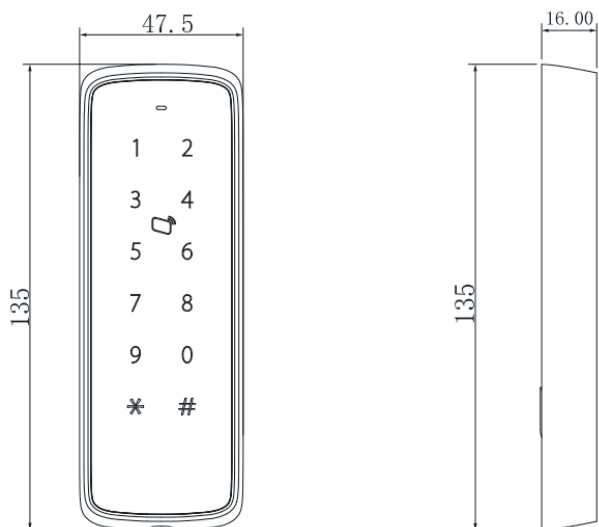

Hiltron Land S.r.l.

Strada Provinciale di Caserta, 218 80144 - Napoli - Italy
Tel: (+39) 081.185.39.000 Fax: (+39) 081.185.39.016
www.hiltronsecurity.net