



- Support RS485, Wiegand34 protocol(Wiegand 26 optional)
- 13.56MHz(Mifare)
- 125KHz(EM-ID)
- All-metal buttons with blue backlight
- Red and Green indicator LEDs
- Watch dog function ensure device free from halting
- Surface mounted installation



LARCXIK

Vandal-proof RFID Reader

Caratteristiche Tecniche

System

Main Processor	8 Bit
----------------	-------

Read

Read Format	13.56MHz	125KHz
Read Range	1cm-3cm (max.)	
Reading time	<0.1s	

Function

Tamper Alarm	Yes
--------------	-----

Interface

To Controller	RS485, Wiegand34(Wiegand 26 optional)
---------------	---------------------------------------



General

Keyboard	12Key(0-9,*,#), number key 5 is a braille button
LED Indicator	Blue backlight
Beep Tone	Buzzer
Ingress protection	IK08
Power Supply	9V-15V DC/100mA
Operating Temperature	-30°C to +60°C
Working Humidity	≤95%
Dimension(WxDxH)	110mm×85mm×26mm
Weight	0.5kg
Working Environment	Indoor

Certificates

CE	Yes
FCC	Yes

Dimensioni

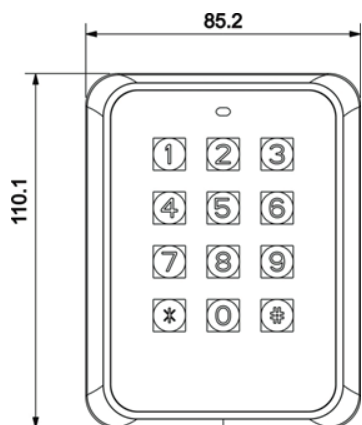

Hiltron Land S.r.l.

Strada Provinciale di Caserta, 218 80144 - Napoli - Italy
Tel: (+39) 081.185.39.000 Fax: (+39) 081.185.39.016
www.hiltronsecurity.net