



- RS-485 protocol
- Default IC (Mifare) card ("D" means ID EM card)
- Support card, fingerprint
- Up to 3000 fingerprints capacity
- Blue backlight
- Watch dog function ensure device free from halting
- Beep and indicator
- Surface mounted installation

# LARFC

FINGERPRINT RFID Reader



## Caratteristiche Tecniche

### System

Main Processor	8 Bit
----------------	-------

### Read

Read Format	13.56MHz	125KHz
Read Range	1cm-9cm (max.)	
Reading time	<0.1s	

### Fingerprint

Capacity	3000
Response Time	≤1.5s
FAR	≤0.00004%
FRR	≤0.15%

### Function

Tamper Alarm	Yes
--------------	-----

### Interface

To Controller	RS485
---------------	-------

### General


LCD Display	Blue backlight
Beep Tone	Buzzer
Power Supply	9V-15V DC/200mA
Operating Temperature	-10°C to +55°C
Working Humidity	5%-95%

Dimension(WxDxH)	125mm×56mm×47mm
Weight	0.25kg
Working Environment	Indoor

### Certificates

CE	Yes
FCC	Yes

## Dimensioni

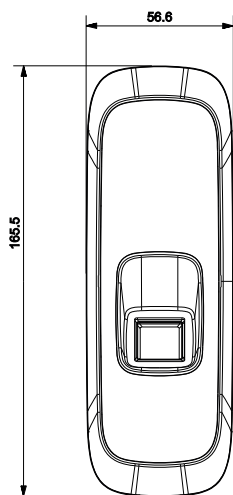

### Hiltron Land S.r.l.

Strada Provinciale di Caserta, 218 80144 - Napoli - Italy  
Tel: (+39) 081.185.39.000 Fax: (+39) 081.185.39.016  
[www.hiltronsecurity.net](http://www.hiltronsecurity.net)