

- Support 30,000 valid cards & 60,000 records
- Support multiple cards (default IC card) (*-D* means ID EM card)
- Support card, password and combination
- TCP/IP to PC
- Wiegand or RS-485 interface to reader
- Door time out alarm, intrusion alarm, duress alarm and tamper alarm
- Anti-passback, multi-card open
- Water-proof design
- Support 128 efficient time and holiday schedules
- Watch dog function ensure device free from halting
- IP66 (Apply silica gel to gaps between the device and the wall. Liquid sodium silicate is recommended. For details, see the quick start guide.)



LASCX

Water-proof RFID Standalone

Caratteristiche Tecniche

System

Main Processor 32 Bit

Input/Output Ports

Input Door sensor x 1, Exit button x 1

Output Relay x 1 (Door lock)

Reader Reader x 1

Card Read

Read Format 13.56MHz 125KHz

Read Range 1cm-2cm (max.)

Response Time <0.1s

Capacity

Cardholders 30,000

Events 60,000

Function

User Management General, VIP, Guest, Patrol, Black list, Duress

Alarm Function Door time out alarm, Intrusion alarm, Duress alarm, Tamper alarm

Period Setting Support 128 groups of schedule, 128 groups of periods and 128 groups of holiday periods

Interface

To PC RJ45 (10/100M)

To Reader Wiegand26/34, RS485

General

Ingress Protection IP66 (Apply silica gel to gaps between the device and the wall. Liquid sodium silicate is recommended. For details, see the quick start guide.)

RTC Yes

Beep Tone Buzzer

Keyboard Sensitive touch keypad with blue backlight

Power Supply DC 9-15V/100mA

Operating Temperature -10°C to +55°C

Working Humidity 10%RH-90%RH (no-condensation)

Dimension(WxDxH) 62.0mmx142.0mmx23.0mm

Weight 0.5 kg



Working Environment Outdoor

Certificates

CE Yes


FCC Yes

Dimensioni

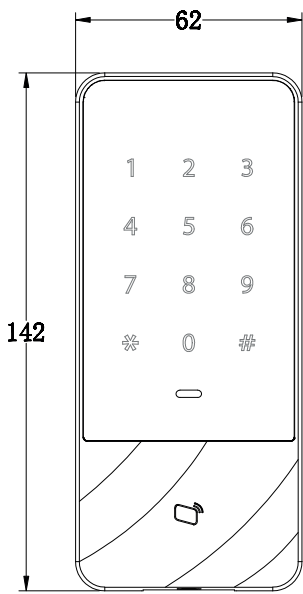

Applicazioni

Small Office
One door controller

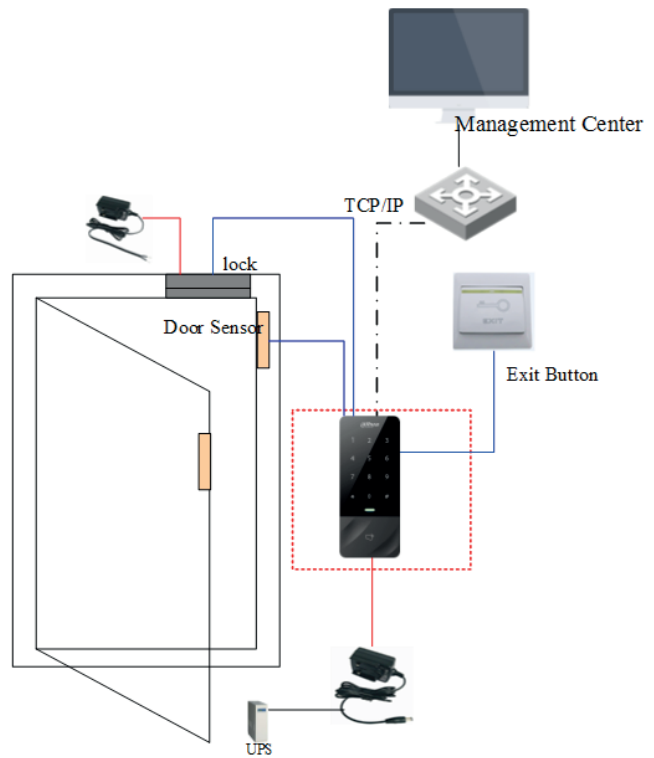

Hiltron Land S.r.l.

Strada Provinciale di Caserta, 218 80144 - Napoli - Italy
Tel: (+39) 081.185.39.000 Fax: (+39) 081.185.39.016
www.hiltronsecurity.net