



Features

- HD CMOS camera
- Large field of view angle
- Night vision
- Voice indication
- Remote intercom with mobile APP
- Surface mounted




VI1PEP

1MP Wi-Fi Outdoor Station

Technical Specification

Mode	DHI-VTO2111D-WP	Ethernet	10M/100Mbps Self-adaptive
System		Network Protocol	TCP/IP
Main Processor	Embedded Micro Processor	General	
Operation System	Embedded LINUX OS	Ingress Protection	IP65
Video		Tamper Switch	1
Video Compression	H.264	Memory Slot	Micro SD, Max 32G
Image Sensor	1/4" 1MP CMOS	Installation	Surface
Lens	2.2mm	Material	Plastic
Angle of View	D:125° H:105°	Power	DC 12V,PoE(802.3af)
Day/Night	ICR	Power Consumption	Standby ≤1W, Work ≤10W
Audio		Working Environments	-30°C~+60°C
Audio Compression	G.711	Relative Humidity	10%~90%RH
Audio Input	Omnidirectional Mic	Dimensions	135mm×70.4mm×34.4mm
Audio Output	Built-in Speaker	Weight	0.4Kg
Bidirectional Talk	Support Dual-way Bidirectional talk		
Operation Mode			
Keypad	Single Mechanical Button		
Reader	Mifare Card		
Body Approaching	1m		
Interface			
Door Control	2(1 relay out for main lock, 1 extended by access control module)		
Alarm In	2(1 ch unlock button, 1 ch feedback)		
RS485	1		
Network			
Wi-Fi	IEEE802.11b/g		


Dimensions

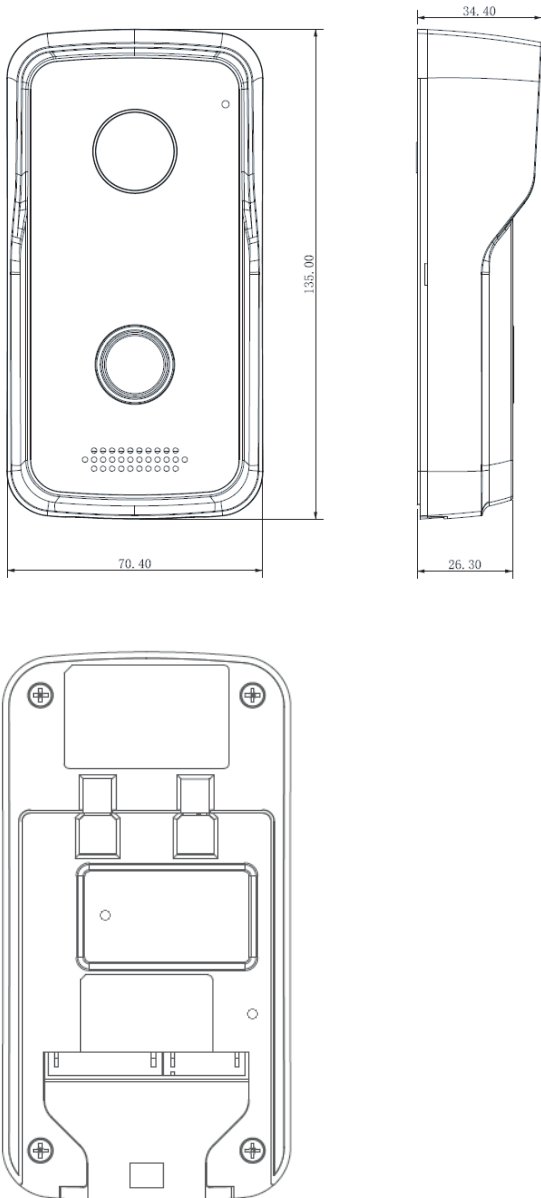

Application


1 – Smart Doorbell

Call Mobile phone APP directly without indoor monitor

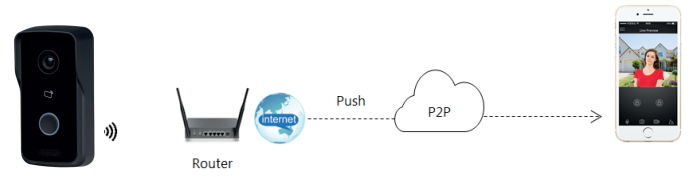

2 – Video Intercom

- Color video & audio call
- IPC surveillance
- Alarm integration
- Remote intercom with mobile APP

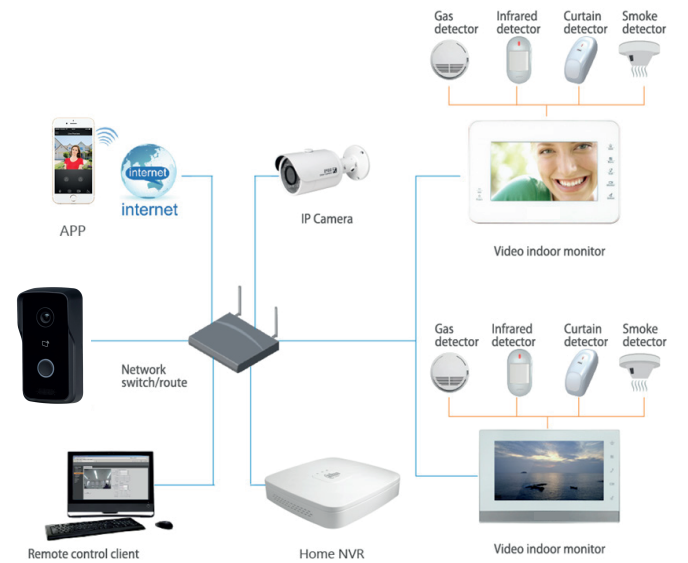

HILTRON LAND SRL

Strada provinciale di Caserta, 218 - 80144 Napoli

Tel: (+39)081 185 39 000 Fax: (+39)081 185 39 016

www.hiltronsecurity.net