



- Modules make the device with great expansibility
- Anodized front aluminum panel; IK07
- Supports voice and video communication
- 2 MP high definition fisheye camera with 160° view range
- Access control function; controls two locks
- Compatible with 2-wire interface and RJ45 interface
- Surface mount and flush mount
- IP65 (Apply silica gel to gaps between the device and the wall. Liquid sodium silicate is recommended.)

VIS2PAG

Modular Outdoor Station

Technical Specification

System

Main Processor Embedded MCU processor

Button

Button Type Mechanical button

Port

Power Output Port 5V DC (Provide power for other modules)

Regular

Power Supply Mode 5V DC (Provided with power by other modules)

Color Silver

Dimensions 100mm×49.90mm
×30.50mm
(3.94"×1.96"×1.20")

Protection Grade IK07; IP65 (Apply silica gel to gaps between the device and the wall. Liquid sodium silicate is recommended. For details, see the quick start guide.)


Operating Temperature -20°C to +60°C (-4°F to +140°F)

Operating Humidity 10%RH–90%RH

Power Consumption 1W

Appearance Color Silver

Dimension

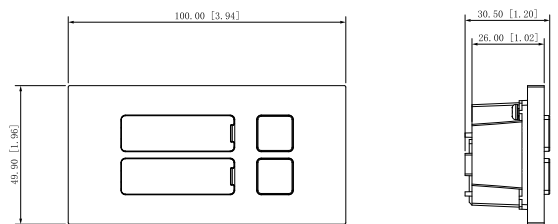

HILTRON LAND SRL

Strada provinciale di Caserta, 218 - 80144 Napoli

Tel: (+39)081 185 39 000 Fax: (+39)081 185 39 016

www.hiltronsecurity.net