



- 2MP HD CMOS camera
- Aluminum panel, IP65,IK08
- ICR Night vision &Voice indication
- Video & Audio messaging
- Remote intercom with mobile APP
- Surface mounted

VIS2PE1R


IP 1 button Villa Outdoor Station

Technical Specification


System	
Main Processor	Embedded Micro Processor
Operation System	Embedded LINUX OS
Video	
Video Compression	H.264
Image Sensor	1/2.8" 2MP CMOS
Focal Length	1.9mm
Angle of View	H:140°
Day/Night	ICR
Audio	
Audio Compression	G.711
Audio Input	Omnidirectional Mic
Audio Output	Built-in Speaker
Bidirectional Talk	Support Dual-way Bidirectional talk
Operation Mode	
Keypad	1/2/4 Mechanical Buttons
Reader	Mifare Card
Interface	
Door Control	1
Alarm In	2(1ch unlock button, 1ch feedback)
RS485	1
Network	
Ethernet	10M/100Mbps Self-adaptive
Network Protocol	TCP/IP
General	
Ingress Protection	IP65, IK08
Tamper Switch	1
Installation	Surface

Material	Aluminum
Power	DC 12V, PoE(802.3af)
Power Consumption	Standby $\leq 1W$, Work $\leq 7W$
Working Temperature	-40°C~+60°C
Relative Humidity	10%~90%RH
Dimensions	182.0mm×30.0mm×101.0mm
Weight	0.8Kg

Dimension

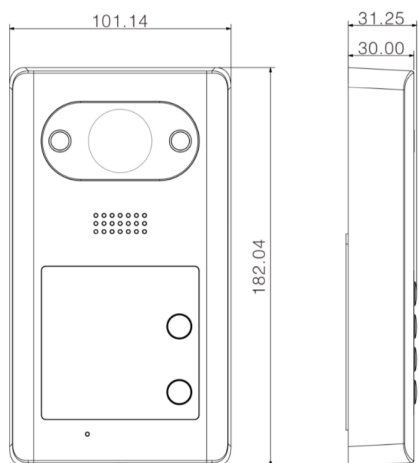

View Area

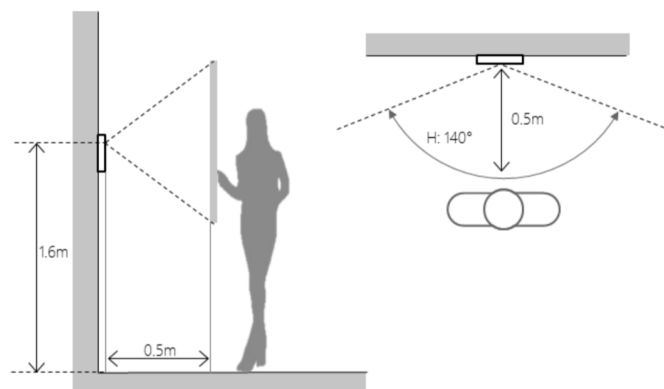

HILTRON LAND SRL

Strada provinciale di Caserta, 218 - 80144 Napoli

Tel: (+39)081 185 39 000 Fax: (+39)081 185 39 016

www.hiltronsecurity.net

REV_0323