



- 7" TFT Capacitive touch screen, 1024x600
- IPC surveillance
- 6ch wired alarm integration, 8ch wireless alarm integration (Only support 433MHZ)
- Micro SD card optional, max 32GB
- Record & Snapshot(SD card needed)

VIS7PIW

IP villa door station

Technical Specification

Model	VTH5221D/DW-S2
System	
Main Processor	Embedded Micro Processor
Operation System	Embedded LINUX OS
Video	
Video Compression	H.264
Audio	
Audio Compression	G.711
Audio Input	All-direction Microphone
Audio Output	Built-in Loudspeaker
Bidirectional Talk	Support Dual-way Bidirectional talk
Display	
LCD Screen	7" 1024x600
Operation Mode	
Input	Touch buttons and capacitive screen
Interface	
Wired Zones	6 on-board zones
Wireless Zones	8 wireless zones
Alarm Out	1
RS485	1


Network

Wi-Fi	IEEE802.11b/g/n
Ethernet	10M/100Mbps Self-adaptive
Network Protocol	TCP/IP

General

Memory Slot	Micro SD, Max 32GB
Installation	Surface
Power	DC 12V, PoE (802.3af)
Power Consumption	Work ≤7W
Working Temperature	-10°C to +55°C
Relative Humidity	10%RH~90%RH
Dimensions	215.0mm×140.0mm×21.0mm
Weight	0.8kg

Dimensions

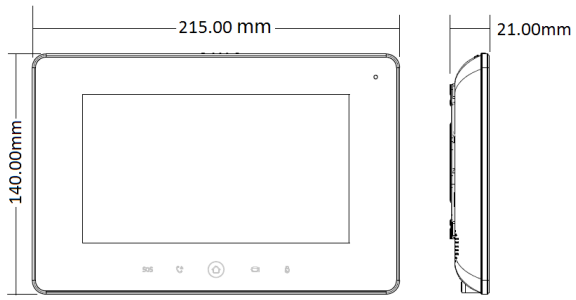

HILTRON LAND SRL

Strada provinciale di Caserta, 218 - 80144 Napoli

Tel: (+39)081 185 39 000 Fax: (+39)081 185 39 016

www.hiltronsecurty.net